

RAY R6A-E

Cloud-managed 2x2:2 Wi-Fi 6
(802.11ax) access point

Built for Hospitality Use Case



Hospitals


Hotels

Conference Centers

Residential Properties

Co-working spaces

Malls

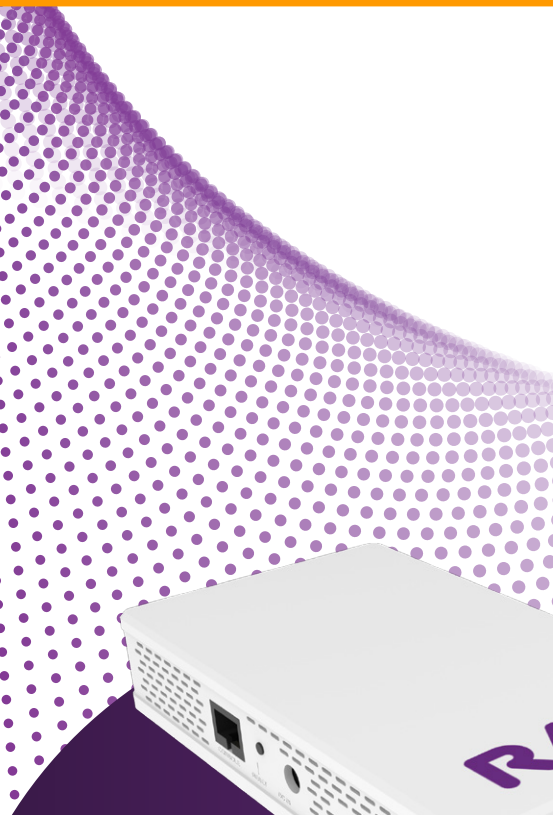

HIGHLIGHTS

- Provides Multiple LAN Ports for Phone
- Wi-Fi 6 driven High-Performance
- LAN Ports support Multicast for IPTV for hospitality industry
- Intelligent Radio Resource Management
- Pocket friendly, helps in lowering the TCO.
- 4X Lan Ports
- Zero Maintenance



SPECIFICATIONS	R6A-E
AP Type	Indoor Wall Plate Access Point
MIMO	2x2 SU-MIMO 2x2 MU-MIMO
Max Aggregate frame rate	Max aggregate frame rate: 1.8 Gbps › 2.4GHz: 574 Mbps › 5GHz: 1201 Mbps
LAN Ports	1 x 10/100/1000 BASE-T Ethernet (RJ45) PoE 1 x 10/100/1000 BASE-T Ethernet (RJ45)
Wi-fi 6	Wall Plate Form factor Hospitality Use Cases

Note: Antenna is inbuilt in R6A-E.

RAY O1ME



RAY Essential



RAY Premium

Services



Edge
Gateway



Switch



Wi-Fi



Sase

Products



Orchestration



Integration



Automation

Centralized
Management



SD-Wan



Firewall



HSIA



Multiwan

Security driven
Networking



Linux
Networking



Multiple
Interfaces



Hardware

Ray OS



Appliance



Virtual

Ray One is a Next Generation Solution for the challenges of today.

Ray One powers Unified Networking and Security across Networks, endpoints, and clouds in a purpose-built cloud-delivered infrastructure that scales.

It employs concepts of convergence to consolidate multiple point products including Cloud SWG, NG CASB, FWaaS, SD-WAN and ADEM, into a single integrated service provide comprehensive cybersecurity protection for all users, devices, and applications and across all network edges. It reduces network and security complexity while increasing organizational agility and ensuring compliance, emphasizes interoperability as well as analytics, intelligence, centralized management, and automation, and integrates with a broad ecosystem of technologies and vendors.

What sets One Apart and distinguished is that it has a network wide visibility with a single pane of glass dashboard and control. Security comes in seamless with automatic firmware updates as well as automatic reporting. One has a unique feature of Self-provisioning for rapid deployment. One being cloud based consists of Cloud based RF Planning. Built-In spectrum analysis as well as Dual- Concurrent radios with band steering come in as features that set apart RF Planning with ONE.

As you will see further all features described in detail for Ray One, we would still like to highlight a couple of features that makes it Secured.

Ray One powered Edge Gateways, Switches and Wireless (Wi-Fi) devices are available to deploy on any network edge.



FEATURES

Adaption for changing business dynamics to address modern requirements funnel down to Network Architecture. Today Ray is being managed and delivered through cloud which enhances features like scalability, speed and flexibility. Enterprises with

Ray are able to leverage powerful automated, zero touch, delivering on demand and a proactive business approach. One Features help the enterprise to make intelligent decisions that adhere business goals and objectives.



Secure SD-WAN

Ray One powers extremely Secure & Advanced SD-WAN with top-tier features like Application Identification & Control, Application-aware traffic control, and Performance Optimization Helping you enable remote working through a secure Access Client & ZTNA. Automatically optimize routing and rerouting of traffic based on WAN Link performance (latency, jitter, loss) in real time with zero impact.

Advance Networking

Ray One powers the most advanced and Secure enterprise-grade networking technology available for NAT, routing, and bridging across all the Edges even empowering Hybrid workforce. It includes Advance routing, Dual Stack Support, static, OSPF, BGP, and RIP with full 802.1Q VLAN support, Multicast, QOS Enablement and Traffic Classification and control amongst others.



Security

Ray One keeps the Enterprise secure even from Ransomware, Malware and even Zero Day threats through high-performance streaming deep packet inspection, next-gen IPS, web protection, DNS Filters, and app control. The powerful Enterprise policies help create Trust Zones in the Network. Ray One enables fast, coordinated detection and enforcement across the entire attack surface to counter the latest known and unknown threats in real time. The threat research is unified data sets feeding from networks, endpoints, and clouds, rich independent research, and comprehensive industry collaboration.

FEATURES

Cloud Architecture

Ray Always One Cloud is Microservices bring unparalleled agility, scale, resiliency. Ray makes it easy to add or remove new features by leveraging a microservices cloud architecture. New enhancements and bug fixes are delivered almost weekly without network disruption. Services scale up or down elastically when they're needed, eliminating the cost and complexity of monolithic hardware.



HSIA (Captive Portal)

Ray One powers 9 kinds of Captive Portal and Guest onboarding flows with advance features like WYSIWYG, Advertisement Server, Survey engine, Payment Gateway along, Multi Language support etc. The Wi-Fi Monetization makes Ray revenue centre for the enterprise. Guest Analytics helps to make data driven business decisions that help growth and revenue.

WAN Suite

Ray One powered Link Bonding taps into the bandwidth of multiple WAN sources to provide a single bonded data-pipe that enables higher speed and resiliency whilst being economical, fast, and easily configurable to suit any networking environment.



Dimensions & Interfaces

AP Name	
R6A-E	
Wi-Fi	
Wi-Fi Standards	802.11 ax/ac/b/g/n
AP Type	Wall Plate, dual radio, 5GHz and 2.4GHz 802.11ax 2x2 MIMO
MIMO	<ul style="list-style-type: none"> 2x2 SU-MIMO 2x2 MU-MIMO
802.11ax, 802.11ac Wave 2 and 802.11n Capabilities	<ul style="list-style-type: none"> DL-OFDMA, UL-OFDMA, TWT support, BSS Coloring 2 x 2 multiple input, multiple output (MIMO) with two spatial streams SU-MIMO, UL MU-MIMO** and DL MU-MIMO support Maximal ratio combining (MRC) & beamforming 20 and 40 MHz channels (802.11n); 20, 40, and 80 MHz channels (802.11ac Wave 2); 20, 40 and 80 MHz channels (802.11ax) Up to 1024-QAM on both 2.4 GHz & 5 GHz bands Packet aggregation: A-MPDU, A-MSDU
Radio 2.4GHz	Two spatial stream Single User (SU) MIMO for up to 591 Mbps wireless data rate with individual 2SS HE40 (HE20) 802.11ax client devices or with two 1SS HE40 (HE20) 802.11ax MU-MIMO capable client devices simultaneously
Radio 5GHz	Two spatial stream Single User (SU) MIMO for up to 1.2 Gbps wireless data rate with individual 2SS HE80 802.11ax client devices, or with two 1SS HE80 802.11ax MU-MIMO capable client devices simultaneously
Max aggregate frame rate	<ul style="list-style-type: none"> Max aggregate frame rate: 1.8 Gbps 2.4GHz: 591 Mbps 5GHz: 1238 Mbps
Supported Data Rates (Mbps)	<ul style="list-style-type: none"> 802.11b: 1, 2, 5.5, 11 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 802.11n: 6.5 to 300 (MCS0 to MCS15, HT20 to HT40), 400 with 256-QAM 802.11ac: 6.5 to 867 (MCS0 to MCS9, NSS = 1 to 2, VHT20 to VHT80), 1,083 with 1024-QAM 802.11ax (2.4GHz): 3.6 to 574 (MCS0 to MCS11, NSS = 1 to 2, HE20 to HE40)
Supported frequency bands	<ul style="list-style-type: none"> Software enabled country-specific restrictions apply 2.412-2.484 GHz 5.150-5.250 GHz (UNII-1) 5.250-5.350 GHz (UNII-2) 5.470-5.600, 5.660-5.725 GHz (UNII-2e) 5.725 -5.825 GHz (UNII-3)

Supported Channels	<ul style="list-style-type: none"> Available channels dependent on configured regulatory domain 2.4GHz: 1-13 5GHz: 36-64, 100-144, 149-165 Dynamic frequency selection (DFS) optimizes the use of available RF spectrum
Supported Radio Technologies	<ul style="list-style-type: none"> 802.11b: Direct-sequence spread-spectrum (DSSS) 802.11a/g/n/ac: Orthogonal frequency-division multiplexing (OFDM) 802.11ax: Orthogonal frequency-division multiple access (OFDMA) with up to 16 resource units (RU)
Supported Modulation Types	<ul style="list-style-type: none"> 802.11b: BPSK, QPSK, CCK 802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM 802.11ax: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM, 1024-QAM
Radio Chains and Spatial Streams	<ul style="list-style-type: none"> 2x2:2 streams SU/MU MIMO 5GHz 2x2:2 streams SU/MU MIMO 2.4GHz
Channelization/PHY Types	<ul style="list-style-type: none"> 802.11n high-throughput (HT) support: HT 20/40 802.11ac very high throughput (VHT) support: VHT 20/40/80 802.11ax high efficiency (HE) support: HE20/40/80
Wireless Authentication	<ul style="list-style-type: none"> WEP, WPA, WPA2-PSK, WPA3 - Personal, WPA3 - Enterprise, WPA3 - Enhanced Open (OWE) Dynamic PSK EAP-TLS, EAP-TTLS, EAP-MSCHAPv2, EAP-SIM IEEE 802.1X based Authentications Captive Portal Based Authentications
Advance Features	<ul style="list-style-type: none"> Advanced Cellular Coexistence (ACC) minimizes interference from cellular networks Maximum ratio combining (MRC) for improved receiver performance Cyclic delay/shift diversity (CDD/CSD) to enable the use of multiple transmit antennas Short guard interval for 20-MHz, 40-MHz, and 80-MHz Space-time block coding (STBC) for increased range and improved reception Low-density parity check (LDPC) for high-efficiency error correction and increased throughput Transmit beam-forming (TxBF) for increased signal reliability and range

Beamforming	Transmit Beamforming and Maximal Ratio Combining
Band Steering	Band steering for 5 GHz clients to connect over 5GHz Radio to provide better load balancing among 2.4GHz and 5GHz Radios.
Beaconing	<ul style="list-style-type: none"> › Transmit Only › Transmit/Receive (Attached Devices) › Transmit/Receive (Unattached Devices)
Roaming/Mobility	<ul style="list-style-type: none"> › Support for IEEE 802.11r or Fast BSS Transition (FT) › Centralized Layer 3 roaming › Seamless Roaming for Captive Portal users

RADIO RESOURCE MANAGEMENT

RF Management	Dynamic RF management to detect and mitigate interference from Wi-Fi
Wi-Fi Channel Management	Automatic Channel Selection by Intelligent Radio Resource Management (iRRM)
Wi-Fi Radio Power Management	Optimum Power management by Intelligent Radio Resource Management (iRRM)
Wi-Fi QOS	Self-healing (on detection of RF interference or loss of RF coverage).

ANTENNA

Antenna (Included in Box)	<ul style="list-style-type: none"> › 2.4GHz omni-directional antennas with 2 dBi peak gain › 5GHz omni-directional antennas with 3 dBi peak gain
----------------------------------	--

WIRELESS SECURITY

Wireless Security	<ul style="list-style-type: none"> › Real-time WIDS/WIPS with instant alerting › Classify Types of Rogue AP <ul style="list-style-type: none"> › WLAN-Spoofing › Same-Network › MAC-spoofing
--------------------------	--

MESH

SON based Mesh	<ul style="list-style-type: none"> › Self-configuring › Self-defending › Self-healing › Self-managing
-----------------------	---

WI-FI OFFLOAD

- › Passpoint Wi-Fi (Release 2) (Hotspot 2.0) for Seamless cellular-to-Wi-Fi
- › Access Network Discovery and Selection Function (ANDSF) Integration

RADIO MANAGEMENT

Antenna Optimization	Polarization Diversity with Maximal Ratio Combining (PDMRC)
Client Density Management	Client Load Balancing distribute clients to the least loaded 802.11 channel and AP
Airtime Fairness	Enhance general client performance

POWER

Peak Transmit Power (Tx port/chain + Combining gain)	<ul style="list-style-type: none"> › Limited by local regulatory requirements › 2.4 GHz band: +20 dBm (18dBm per chain) › 5 GHz band: +19 dBm (18 dBm per chain) › Note: conducted transmit power levels exclude antenna gain.
Transmit power	Configurable in increments of 0.5 dBm
Maximum EIRP (2.4 GHz band)	<ul style="list-style-type: none"> › Limited by local regulatory requirements › 2.4 GHz band: <ul style="list-style-type: none"> › 565: 29.2 dBm EIRP › 567: 33 dBm EIRP
Maximum EIRP (5 GHz band:)	<ul style="list-style-type: none"> › Limited by local regulatory requirements › 5 GHz band: <ul style="list-style-type: none"> › 565: 31.4 dBm EIRP › 567: 32.7 dBm EIRP

NMS INTEGRATION

SNMP support

PERFORMANCE

Maximum number of associated client devices	<ul style="list-style-type: none"> › Up to 256 associated client devices per radio › Up to 512 clients per AP
Maximum number of BSSIDs	<ul style="list-style-type: none"> › 16 BSSIDs per radio › Up to 31 per AP

NETWORKING

IP	IPv4, IPv6, dual stack
VLAN	<ul style="list-style-type: none"> › 802.1Q (1 per BSSID or dynamic per user based on RADIUS) › VLAN Pooling › Port-based
802.1x	Authenticator & Supplicant
Tunnel	<ul style="list-style-type: none"> › L2TP › GRE/EoGRE › Openvpn › L2TP/IPSEC
Policy Management Tools	<ul style="list-style-type: none"> › Application Recognition and Control › Access Control Lists › Device Fingerprinting › Rate Limiting › Integrated Layer 7 firewall with mobile device policy management › Flexible guest access with device isolation
Quality of Service	<ul style="list-style-type: none"> › WMM Access Categories with DSCP and 802.1p support › QoS-based scheduling › Directed Multicast › L2/L3/L4 ACLs
Modes	<ul style="list-style-type: none"> › Gateway Mode › Bridge & Firewall › Bridge No Firewall

External Authentication	<ul style="list-style-type: none"> › Authentication via Radius › Authentication via LDAP › Authentication via Single Sign-On (SSO) › Authentication via Active Directory (AD)
Radius	<ul style="list-style-type: none"> › Radius Option 82 Support
Tunnel	<ul style="list-style-type: none"> › L2TP › GRE/EoGRE › Openvpn › L2TP/IPSEC › PPTP › Wireguard/SSL
L3 Features	Routing Protocols: <ul style="list-style-type: none"> › Static unicast routes › Equal cost multipath routing (ECMP) RIP v1/v2 › OSPF › BGP4+ VRRP › Generic routing encapsulation (GRE) › Standard 802.1d Spanning Tree Protocol › Network Address Translation (NAT) › Dynamic Host Configuration Protocol (DHCP) › server, relay, and client › Access control lists (ACLs) › IPv4 and IPv6 Multicast

SD-WAN

Topology Support	Hub & Spoke Topology Mesh Topology
Multi-WAN Support	Link Failover Link Balancing Link Bonding/Aggregation
Application Aware	Application based Routing Application Priority

NETWORK SECURITY

- › Integrated Layer 7 firewall with mobile device policy management
- › Flexible guest access with device isolation
- › VLAN tagging (802.1q) and tunneling with IPsec VPN
- › Secure Boot, runtime defences/image signing/integrity verification, and hardware authenticity.
- › PCI compliance reporting
- › IP filtering policies or ACL
- › Device Profiling & VLAN mapping
- › L2 Isolation, ARP Blocking
- › DDoS Detection
- › Anti-Malware, Anti-Phishing and Anti-SPAM Engines.

ENTERPRISE POLICY

Enterprise Policies (Applicable Per User/Group/SSID)	<ul style="list-style-type: none"> › Time Policy to Control the Access Time › Speed Policy to Control Upload/Download Bandwidth › Device Policy to control Device Type › Quota Policy to control Time or Volume Usage › Concurrency Policy to control simultaneous user login › Application Policy to control L7 Policy › Web Categorization Policy to control browsing by Category › DNS Filter Policy to filter DNS requests
---	--

QUALITY OF SERVICE (QOS)

- › Advanced Power Save (U-APSD)
- › WMM Access Categories with DSCP and 802.1p support
- › Layer 7 application traffic identification, prioritization & shaping Per SSID/Group/User
- › QoS configuration for applications based on categories.
- › 802.11e WMM Support

GUEST CAPTIVE PORTAL

Guest Captive Portal Authentication Modes	<ul style="list-style-type: none"> › Click To Login › Voucher › Username & Password › SMS OTP › Email OTP › Custom Survey › Social Media › Advertisement › Payment Gateway
Survey Engine	<ul style="list-style-type: none"> › Create Custom Survey with the below Questions › Short Answer › Long Answer › Email ID › Phone Number › Star Rating › Smiley Rating › Dropdown › Radio Button › Multi Select
Advertisement Engine	<ul style="list-style-type: none"> › Display Picture or Video Advertisements Per Venue › Display Statistics, Clicks, Views, Revenue generated per Venue/Advertisement
PMS Integration	Oracle Opera PMS and Fidelio Suite8 PMS (IFC Part Number 5009-313)

FIRMWARE

- › Flash Security Updates (No Reboot Required)
- › Cloud Managed Firmware Updates

PHYSICAL INTERFACES	
Ethernet (WAN)	<ul style="list-style-type: none"> › 1x 10/100/1000 BASE-T Ethernet (RJ45) › Power over Ethernet (802.3af/at) with Category 5/5e/6 cable PD. LLDP › Auto-sensing link speed and MDI/MDX › 802.3az Energy Efficient Ethernet (EEE)
Ethernet (WAN)	› 4 x 10/100/1000 BASE-T Ethernet (RJ45)LLDP
PassThrough Port	1 x PassThrough Port (RJ45)
Console Port	1 x Console Port
USB 2.0	1 x USB 2.0
Reset Button	Reset to the factory default settings
Indicators	<ul style="list-style-type: none"> › 1 x System › 1 x 2.4G Wi-Fi › 1 x 5.8G Wi-Fi › 1 x WAN › 4 x LAN
DC Power	1x DC power connector
DIMENSIONS	
Physical Size	<ul style="list-style-type: none"> › L=160 › B=86 › H=29
Weight	0.3 Kg
MOUNTING	
<ul style="list-style-type: none"> › Mounts to walls and horizontal, vertical, and angled poles › All standard mounting hardware included 	

ENVIRONMENTAL	
Operating temperature	0°C to +40°C / 32°F to +104°F
Humidity	5%~95% non-condensing Internal
Storage Temperature	-40° C to +70° C (-40° F to +158° F)
Storage Humidity	5%~95% non-condensing Internal
POWER	
Maximum (worst-case) power consumption:	24W
Maximum (worst case) power consumption in idle mode:	6.1W
Maximum (worst case) power consumption in deep-sleep mode:	3.3W Power sources sold separately
802.3at PoE+	18.71W
Power over Ethernet (PoE+):	802.3at-compliant
RELIABILITY	
Mean Time Between Failure (MTBF): 1,315,612 hrs at +25°C operating temperature	
CONTROLLER	
Public Cloud	Ray ONE hosted on Public Cloud
Private Cloud	Ray ONE hosted on Private Cloud/Data-center
WARRANTY	
As per the purchased SKU	
BOX CONTENTS	
<ul style="list-style-type: none"> › Standard Mounting Kit › Ethernet Cable › Quick Start Guide 	



SPECIFICATIONS

2.4GHZ RECEIVE SENSITIVITY (dBm)

HT20		HT40		VHT20		VHT40	
MCS0	MCS7	MCS0	MCS7	MCS0	MCS11	MCS0	MCS11
-92	-72dBm	-90dBm	-71dBm	-93dBm	-63dBm	-91dBm	-60dBm

5GHZ RECEIVE SENSITIVITY (dBm)

HT20		HT40			
MCS0	MCS7	MCS0	MCS7		
-93dBm	-75dBm	-91dBm	-72dBm		
VHT20		VHT40		VHT80	
MCS0	MCS11	MCS0	MCS11	MCS0	MCS9
-93dBm	-74dBm	-91dBm	-72dBm	-88dBm	-62dBm
HE20		HE40		HE80	
MCS0	MCS11	MCS0	MCS11	MCS0	MCS11
-93dBm	-63dBm	-90dBm	-60dBm	-87dBm	-56dBm

2.4 GHZ RF Power

MCS0	HT20	23±1dBm
MCS7	HT20	22±1dBm
MCS0	HT40	22±1dBm
MCS7	HT40	21±1dBm
MCS0	HE20	21±1dBm
MCS11	HE20	20±1dBm
MCS0	HE40	20±1dBm
MCS11	HE40	19±1dBm

5 GHZ RF Power

MCS0	HT20	23±1dBm
MCS7	HT20	22±1dBm
MCS0	HT40	22±1dBm
MCS7	HT40	21±1dBm
MCS0	VHT20	22±1dBm
MCS9	VHT20	21±1dBm
MCS0	VHT40	22±1dBm
MCS9	VHT40	20±1dBm
MCS0	VHT80	20±1dBm
MCS9	VHT80	19±1dBm
MCS0	HE20	21±1dBm
MCS11	HE20	20±1dBm
MCS0	HE40	20±1dBm
MCS11	HE40	19±1dBm
MCS0	HE80	19±1dBm
MCS11	HE80	18±1dBm

SUBSCRIPTIONS

ESSENTIAL	CONNECT	PROTECT	TOTAL
Cloud Subscription	Cloud Subscription	Cloud Subscription	Cloud Subscription
Essential Support	Essential Support	Essential Support	Essential Support
L3 Networking	L3 Networking	L3 Networking	L3 Networking
RRM	RRM	RRM	RRM
WAN Suite	WAN Suite	WAN Suite	WAN Suite
	SD-WAN	SD-WAN	SD-WAN
	SASE	SASE	SASE
		Network & Web Protection	Network & Web Protection
		Captive Portal	Captive Portal
			EYE
			INSIGHTS
			VIGIL
12 Months (Renewal required)	12 Months (Renewal required)	12 Months (Renewal required)	12 Months (Renewal required)
36 Months (Renewal required)	36 Months (Renewal required)	36 Months (Renewal required)	36 Months (Renewal required)
60 Months (Essential Lifetime)	60 Months (Essential Lifetime)	60 Months (Essential Lifetime)	60 Months (Essential Lifetime)

HARDWARE WARRANTY

Essential Hardware Warranty	Premium Hardware Warranty
Available for 1,3 & 5 Years	Available for 1,3 & 5 Years
Return & Replace Warranty	Advance Replacement with NBD Shipping

SOFTWARE SUPPORT

Essential Software Support	Premium Software Support
Available for 1,3 & 5 Years	Available for 1,3 & 5 Years
Support time 8*5	Support time 24*7
Email Support	Email Support
Web Support	Web Support
Chat Support	Chat Support

For More details on warranty visit: www.ray.life

What is included in the box

1. R6A-E
2. Theft Protection M3X4 screw
3. M4X25 screwX2
4. Mounting Plate




1. R6A-E



2. Theft Protection M3X4 screw



3. M4X25 screwX2



4. Mounting Plate

ORDERING MECHANISM

R6A-E Hardware

SKU	Product Name	Description
RWHCC0N147	R6A-E Wi-Fi 6 Wall Plate Wireless Access Point	<ul style="list-style-type: none"> › Wi-Fi 6 (802.11 AX) Wall Plate Wireless Access Point › 1800 Mbps › 2x2 MIMO › 1 x 1G (WAN, PoE) › 4 x 1G (LAN)

R6A-E Hardware Support

RWWSC0N256	R6A-E 12 Months Essential Warranty	R6A-E 12 Months Essential Warranty Return & Replace Hardware Warranty
RWWSC6N256	R6A-E 36 Months Essential Warranty	R6A-E 36 Months Essential Warranty Return & Replace Hardware Warranty
RWWSC8N256	R6A-E 60 Months Essential Warranty	R6A-E 60 Months Essential Warranty Return & Replace Hardware Warranty
RWWSC0N257	R6A-E 12 Months Premium Warranty	R6A-E 12 Months Premium Warranty Advance Replacement with NBD Ship
RWWSC6N257	R6A-E 36 Months Premium Warranty	R6A-E 36 Months Premium Warranty Advance Replacement with NBD Ship
RWWSC8N257	R6A-E 60 Months Premium Warranty	R6A-E 60 Months Premium Warranty Advance Replacement with NBD Ship

R6A-E Subscription Plans		
RWHSC4N183	R6A-E Essential Subscription for 12 Months	<ul style="list-style-type: none"> › R6A-E Essential Subscription for 12,36 & 60 Months › Includes › Cloud Subscription › Essential Support › L3 Networking › RRM
RWHSC6N183	R6A-E Essential Subscription for 36 Months	
RWHSC8N183	R6A-E Essential Subscription for 60 Months	
RWSSC4N237	R6A-E Connect Subscription for 12 Months	<ul style="list-style-type: none"> › R6A-E Essential Subscription for 12,36 & 60 Months › Includes › Cloud Subscription › Essential Support › L3 Networking › RRM › WAN Suite › SD-WAN › SASE › Network & Web Protection › Captive Portal
RWSSC6N237	R6A-E Connect Subscription for 36 Months	
[RWSSC6N237] R6A-E Connect Subscription (36	R6A-E Connect Subscription for 36 Months	
RWASC4N184	R6A-E Protect Subscription for 12 Months	
RWASC6N184	R6A-E Protect Subscription for 36 Months	
RWASC8N184	R6A-E Protect Subscription for 60 Months	
RWHSC4N199	R6A-E Total Subscription for 12 Months	<ul style="list-style-type: none"> › R6A-E Essential Subscription for 12,36 & 60 Months › Includes › Cloud Subscription › Essential Support › L3 Networking › RRM › Network & Web Protection › Captive Portal › WAN Suite › SD-WAN › SASE › EYE › Insights › Vigil
RWHSC6N199	R6A-E Total Subscription for 36 Months	
RWHSC8N199	R6A-E Total Subscription for 60 Months	

USE CASES




Residential Properties



Hospitals



Co-Working Spaces

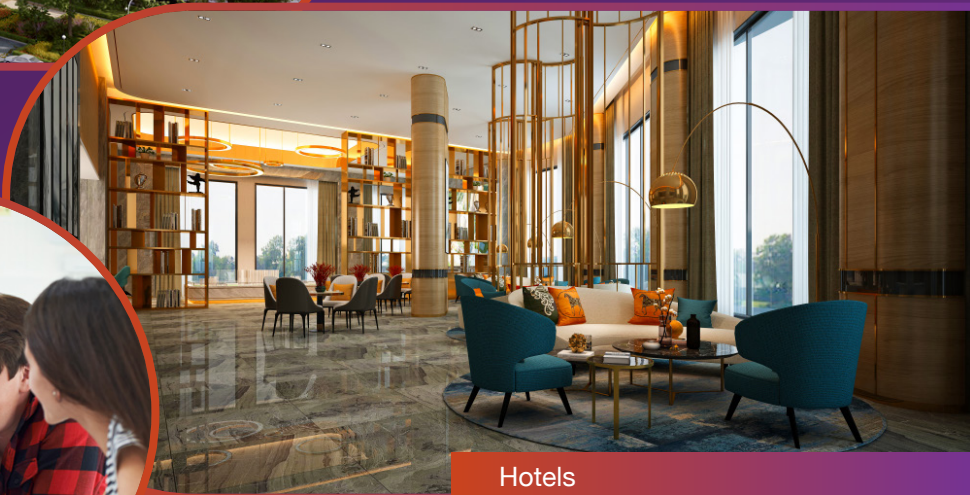






















Hotels



Malls

Our Clients

Ray Pte. Ltd.
ray.life | sales@ray.life
Suite #09-01, 20 Collyer Quay, Singapore 049319

RAY
Secure Networking

© Copyright 2023 Ray Pte. Ltd. All Rights reserved. Ray, Ray.life and the Ray logo are trademarks of Ray Pte. Ltd. in Singapore, India and other countries. This product is protected by Singapore and international copyright and intellectual property laws. The information contained herein is subject to change without notice. The only warranties for Ray Pte. Ltd. products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Ray Pte. Ltd. shall not be liable for technical or editorial errors or omissions contained herein.